


Tube Making Machines for all Heat Exchange, Cable, Thinwall Applications

DIMPLE FREE ZONE TUBE DIMPLING STATION

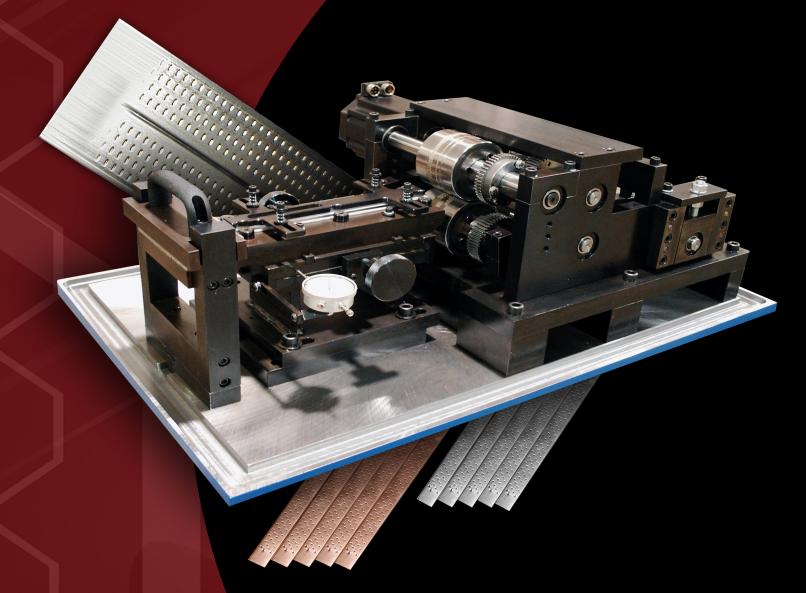

Dimple Station Tech Specifications

- Precision dimple and rib placement at cut end of tube for 100% tube-to-header braze
- Two and three-chamber tubes with or without dimples
- PLC controlled self adjusts every cut
- Up to 183 meters per minute (600 FPM)
- Exceeds 10 discrete dimple patterns per second